INSTRUCTION






| Model | Product | Code |
|----------------------|------------------|--------|
| YAMAHA Tenere 700/T7 | Fairing Extender | FE-YT7 |

CONTENTS


- 1. 2pcs Fairing Extender
- 2. 4pcs screws M5X15 (allen-oval-washer)
- 3. 4pcs washers 5X15 (plastic)

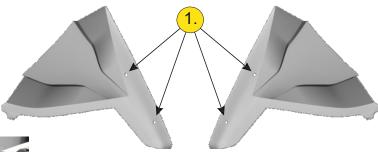



Remove the side transparent piece by removing the two screws (red arrows) as shown in the photo. After unscrewing it, pull it forward to unbutton the back part.

You may store the screws and side parts in case you want to restore it to its original form in the future.

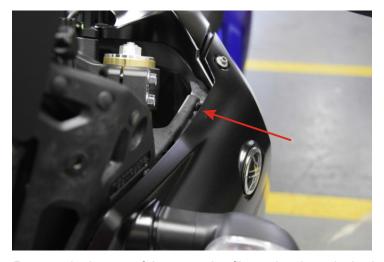

Remove the bottom of the protective film and at the point it where it has the holes.

Then place the new side part step by step. First put the back of the side of the part in place of the old plastic (as

demostrated in the photo). It must enter the notch of the previous parts.





Tighten the two screws included in the package (as demostrated by the arrows in the photo). After tightening them completely, remove the protective film.



This will be the end result. Good rides with less air on your shoulders!