



**C-RACER**  
www.c-racer.com

# INSTRUCTION

Page 1/8

Model	Product	Code
YAMAHA Tenere 700/T7	Licence Holder Plate	NP-YT7

## CONTENTS

1. 1pc Metal base (NP-YT7)
2. 2pcs M5X10 screws (allen-oval-washers)
3. 2pcs fit 3X125

**Caution:** A lot of work is required to install this product. First read the instructions and if you think you do not have the knowledge to install it, we suggest to contact a technician.



**The product is for race use only**

For any further information please do not hesitate to contact us: Tel.: +30 2108075387 Email: [info@c-racer.com](mailto:info@c-racer.com)



With the motorcycle key, remove the rear part of the saddle, then unscrew and remove the front part of it.



Then unscrew the license plate from the motorcycles base.



Remove the front side cover by removing the 3 screws that hold it. To remove it you must also unfasten a clip that is on the inside.



Unscrew the 4 support brackets on the sides.



Then remove the 6 screws that are on the side/bottom part, as the photo shows.



At the front, on each side it has two clips (Right and Left). Lightly press the middle pin and with a small screwdriver remove them.



Then remove the 5 screws located on the top as shown by the arrows in the photo.



Now carefully remove the plastic cover. You will need to open it slightly at the front outwards and then backwards, because it has a clasp just above the lantern. Careful moves are required so you don't break any base.



On the left side you will find 4 plugs that are for the back light, turn signals and license plate light. First open the clip that holds it all together and disconnect their silk plugs.



At the bottom there are 4 screws that hold it all together tail. Remove them carefully.



Remove from the motorcycle the entire rear part, such as the photo shows.



Cut the fitting that holds the taillight cable.



Unscrew the two screws holding the light. You will remove the rest of the base afterwards because you will use it again.



Unscrew the two screws that are on the back, like the photo shows.



Also remove the screw hidden inside hole at the front.



Remove all 4 screws of the back cover.



Now all the parts are separated.  
Also remove the base that held the lantern from the front of the base, on the screws shown by the arrows in the photo.




Cut the dowels that hold the wires together.



Remove the flashers above the base. Safety first and then push it through its elastic base from the hole that holds it.



When you have a solution to everything, keep what is shown by photo and the rest save them if to future you want to restore your motorcycle at its original form.

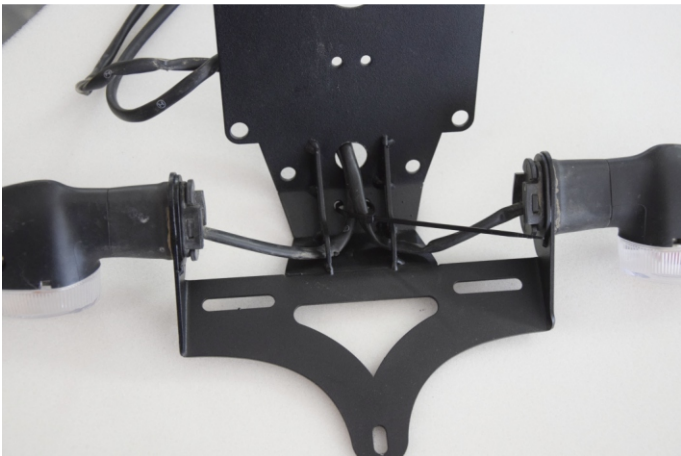

On the new license plate holder place the flashers with the same way you removed them. Remember the gray plug is for left turn signal. Make sure the cables pass through hole and put a fit to keep them tight.



Then place the base that will hold the headlight.




Screw the light back to its old position as well.




After that tighten all screws.




Place the base and screw it at the old position the old base with the same screws.

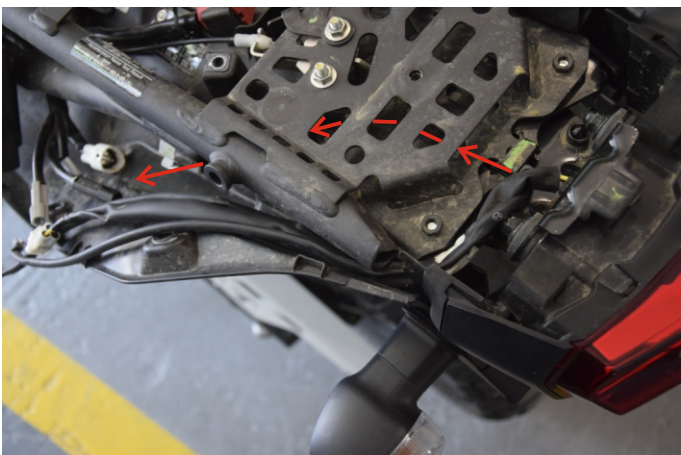

Place the wires for the flashes through the base, as the photo shows, while the cable for the light will be placed at its old position.

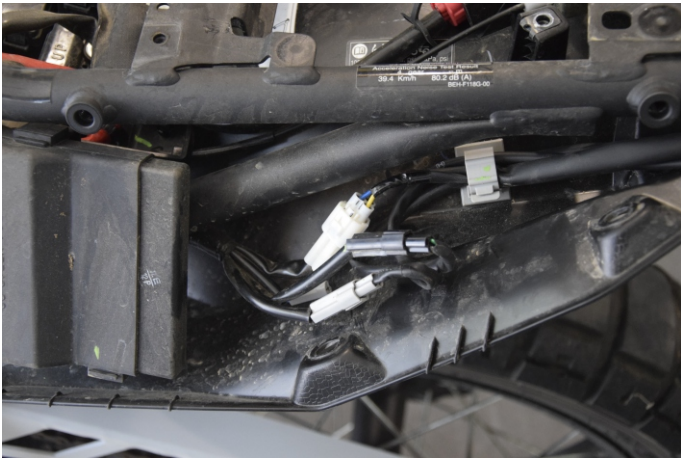

Reconnect the plugs and run the cables to the base that holds them as they were before.

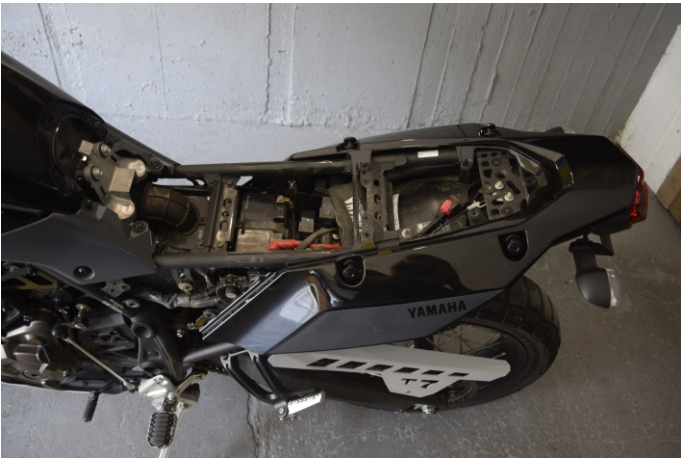

Put the cover back on, remember the snap that it's above the traffic light, so you have to click that first and then the front. Screw them all back on screws and the two small clips on the front part.



Place the side covers and of course the saddle.



This will be your final result. At this point you may also place your license number plate. Enjoy your rides!