



C-RACER
www.c-racer.com

INSTRUCTION

Model	Product	Code
Yamaha XSR 700 2016+	Front Fender Café Racer	FFCR-YXSR


You are advised to read the instructions carefully, before you proceed to any changes.
Any modifications on your motorcycle should be performed by specialized personnel,
however the installation process of this product is quite easy if you follow the instructions below.



CONTENTS

- 1 X Plastic Fender
- 4 X screws M6X15 (allen-round head-washer)
- 4 X washers 6X18 (plastic)

1

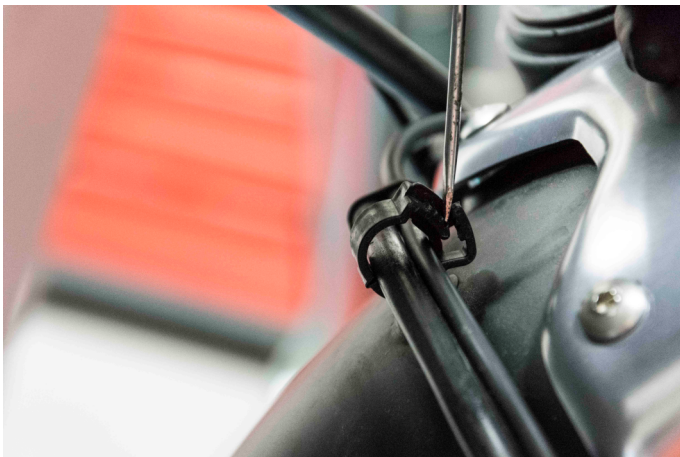


Undo the clip tha's holding the brake tubes together.



Undo the side screws that hold the fender in place.

2

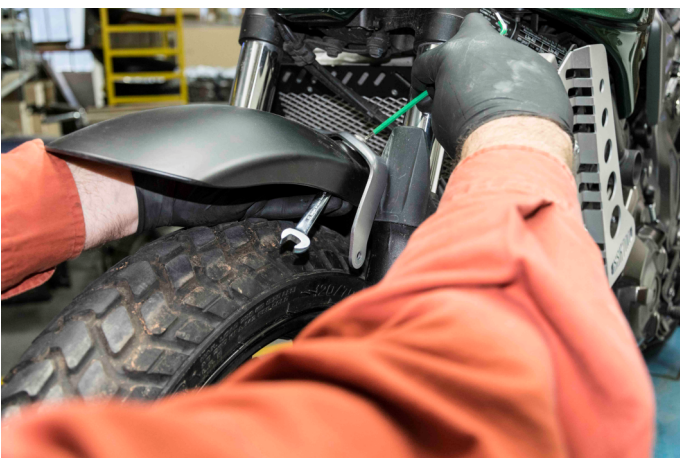

Lift up the fender so that there is enough room to place your hand underneath it, and undo the screws that hold the fender to the fork brace, so that they both become released.



3




Remove the fork brace first by twisting it around so that there's enough room to pull it out.

4




Then do the same to remove the fender.

5

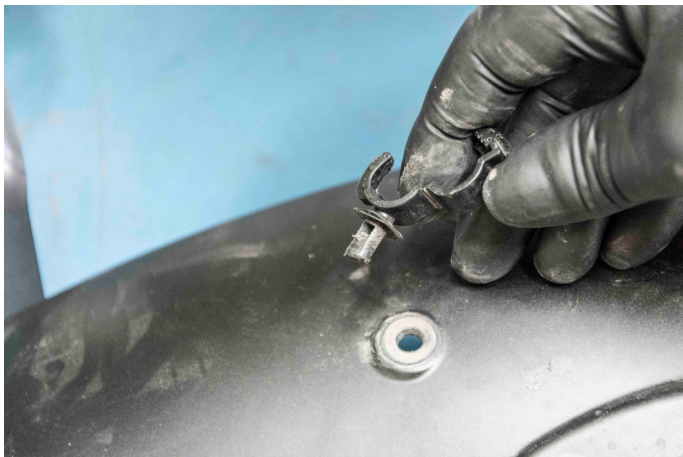

Remove the clip on that held the old fender in place – you will have to turn it upside down to release it on both sides.

6

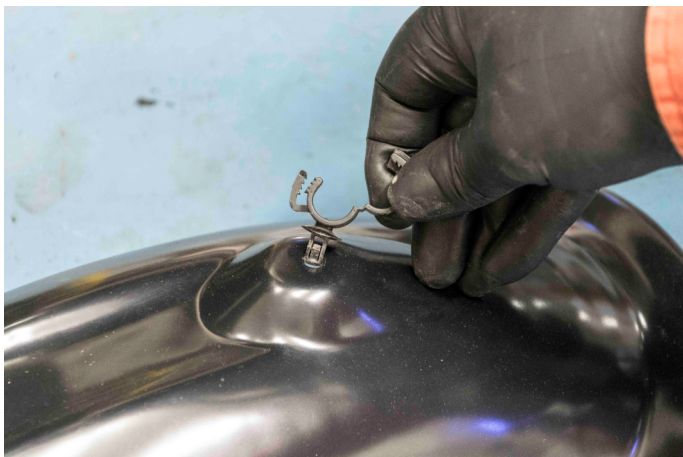

Use the same clip on on your new fender.

7



Place the new fender in position – twist it around so that it fits to go through and under the brake tubes.
You might have to apply some pressure on both sides since there's not enough space in between – the fender is plastic so there should be no problem when you apply pressure.

8



Screw on the left side first – then at the rear end you will have to screw tight the plate that holds the tubes together.

9



Slide the tubes through the clip and close it. Then screw tight the right hand side of the fender as well.



The end result should appear as in the photo on the left.
Thank you for choosing one of our products.
You may watch the installation video at the following link: <https://youtu.be/HqwFnbG2c2k>

The product is for race use only

For any further information please do not hesitate to contact us: Tel.: +30 2108075387 Email: info@c-racer.com