



**C-RACER**  
www.c-racer.com


# INSTRUCTION

Model	Product	Code
Yamaha XSR 700 2016+	Front Fender Scrabler	FFSCR-YXSR

You are advised to read the instructions carefully, before you proceed to any changes.  
Any modifications on your motorcycle should be performed by specialized personnel,  
however the installation process of this product is quite easy if you follow the instructions below.

## CONTENTS

1 X Plastic Fenter

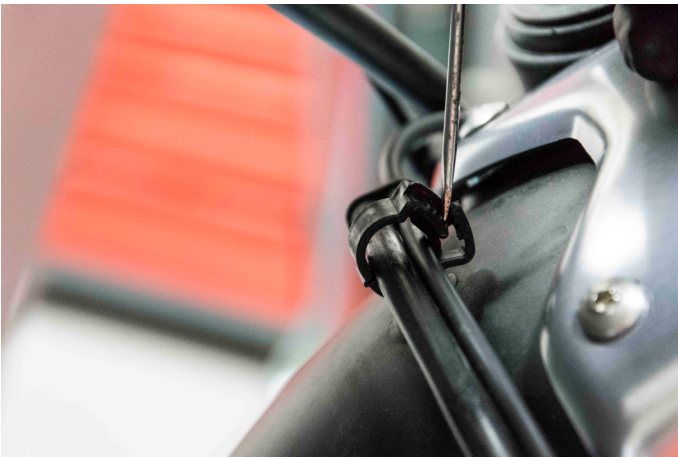

1

Undo the clip on that's holding the brake tubes together.



Undo the side screws that hold the fender in place.



2

Lift up the fender so that there is enough room to place your hand underneath it, and undo the screws that hold the fender to the fork brace, so that they both become released.



3



Remove the fork brace first by twisting it around so that there's enough room to pull it out.

4



Then do the same to remove the fender.

5




Remove the clip on that held the old fender in place – you will have to turn it upside down to release it on both sides.

6




Screw on the fender along with the fork brace. Underneath the fork brace there's an arrow that points to the front. Use the old screws and the clip on from your old fender to place the new fender -

7

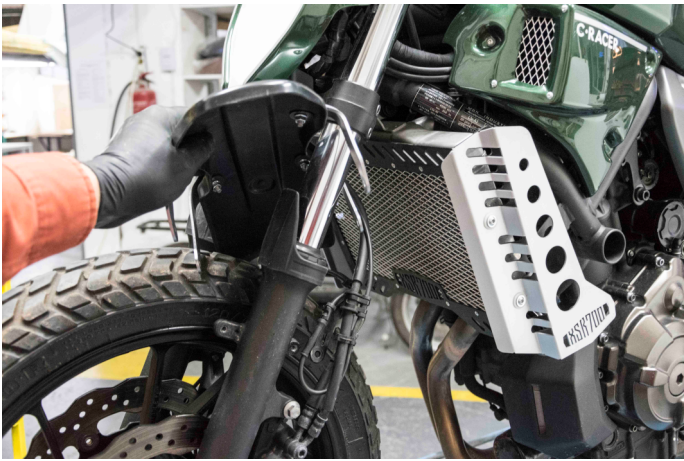

Place the new fender in position – twist it around so that it fits to go through and under the brake tubes.

8

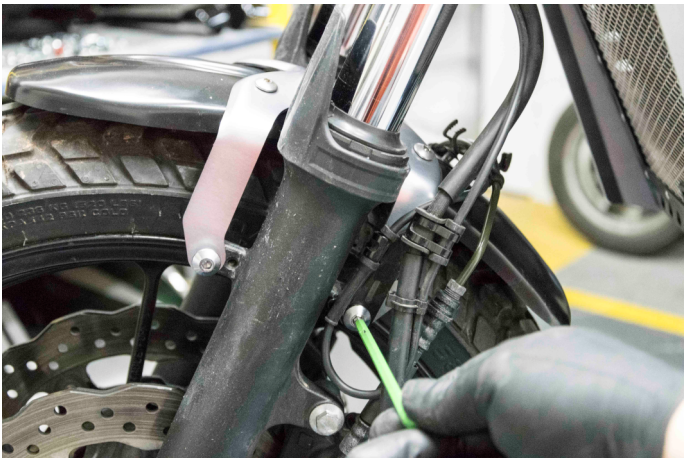

Screw on the left hand side first – then at the rear end you will have to screw tight the plate that holds the tubes together. Use the old screws.

9



Slide the tubes through the clip and close it. Then screw tight the right hand side of the fender as well.



The end result should appear as in the photo on the left. Thank you for choosing one of our products. You may watch the installation video at the following link: : <https://youtu.be/HqwFnbG2c2k>

**The product is for race use only**

For any further information please do not hesitate to contact us: Tel.: +30 2108075387 Email: [info@c-racer.com](mailto:info@c-racer.com)