



C-RACER
www.c-racer.com

INSTRUCTION

Model	Product	Code
Yamaha XSR 700 2016+	Fork Guards	FG-XSR

You are advised to read the instructions carefully, before you proceed to any changes.
Any modifications on your motorcycle should be performed by specialized personnel,
however the installation process of this product is quite easy if you follow the instructions below.



CONTENTS


- 2 X Plastic Cover
- 1 X Metall support (L-XSR-FT)
- 6 X foam tape 20X40X2
- 4 X tire ups 7X350

1



Slide the two tire ups through the underside of the fork guard covers, as shown in the photo. The heads of the tire ups should be on the outer side of the covers.


2

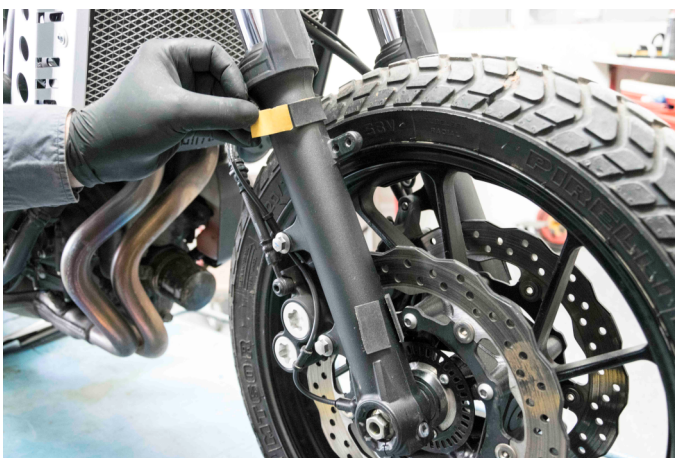

Clean the fork tubes well so that there is no trace of mud or dirt.
Stick the foam tapes – three pieces on each tube, as in the photo on the left – two of the pieces vertically and one horizontally.



3

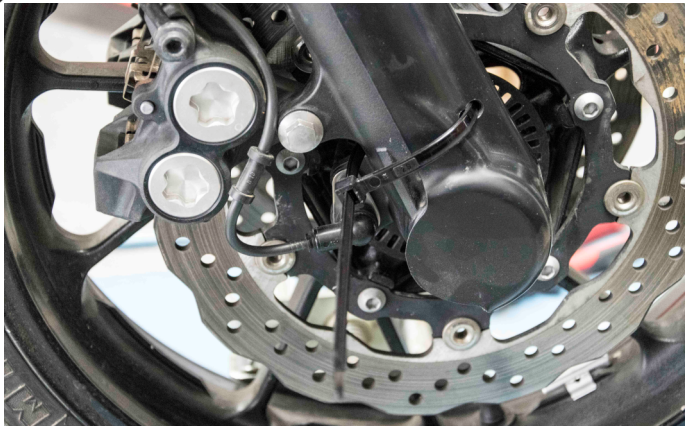

Place the tire up at the the bottom behind the tube. Be careful not to clip on one of the wires or the tubes.
Pull the tire ups tight and cut off the remaining parts.

4



Push the tire ups towards the back so that their head is not visible.

Αν θέλετε μπορείτε να βγάλετε το κλιπ που συγκρατεί τα σωληνάκια από το φτερό και να χρησιμοποιήσετε μόνο την γέφυρα. Το μεταλικό εξάρτημα που σας δίνουμε, θα σας βοηθήσει ώστε να ξαναβάλετε το κλιπ και να συγκρατήσετε τα σωληνάκια.

5



If you wish you may remove the clip that holds the tubes from the fender and use only the fork brace.
The metal wench that is included in the package will help you replace the clip that holds together the tubes.



The end result should appear as in the photo on the left.
Thank you for choosing one of our products.
You may watch the installation video at the following link: <https://youtu.be/HgHybU7XI-g>

The product is for race use only

For any further information please do not hesitate to contact us: Tel.: +30 2108075387 Email: info@c-racer.com