

INSTRUCTION

Model	Product	Code
Yamaha XSR 700 2016+	Headlight Guard Grill & Screen	LG-YXSR


You are advised to read the instructions carefully, before you proceed to any changes.

Any modifications on your motorcycle should be performed by specialized personnel, however the installation process of this product is quite easy if you follow the instructions below.




CONTENTS

- 1 X Metallic Grill (PLG-XSR)
- 3 X plexiglass screens (transparent-yellow-grey)
- 2 X adaptors M6X22X10 (RLG-XSR)
- 2 X adaptors 8X12X11
- 2 X plastic washers 6X18
- 2 X screws M6X30 (allen round head washer)
- 6 X screws M4X10 (allen round head washer)
- 3 X nuts M4 (washer)
- 3 X extenders M4X10
- 3 X washers M5 (plastic)
- 3 X screws M6X10 (hexagonal plastic)

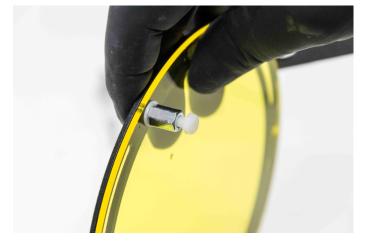

Place the three screws with their extenders as ashown in the photo and tighten them.

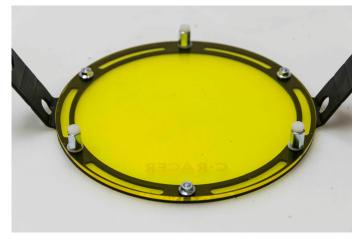

The layout of the screws should be as in the photo on the left.

Two extenders with plastic screws – one on top and one on the bottom.

1

7





Undo the side screws of the headlight.



On the inner side of the headlight, remove the thread that's holdin it in place. You can do it by using the old screw to pull it out.



Put on the new adaptors in place of the old ones.



Place the headlight in position and put the small adaptors on both outer sides of the headlight –you will need to hold it in place with your hand until you put on the grill as well.



Place the grill and slide through the new screws with the washers – you should adjust the grill's position before tightening all the screws. You may undo the plastic screws if you wish so that they almost fall on the perimeter of the headlight.



The end result should appear as in the photo above.
Thank you for choosing one of our products.
You may watch the installation video at the following link: https://youtu.be/k1tVLI7nMAk

The product is for race use only

For any further information please do not hesitate to contact us: Tel.: +30 2108075387 Email: info@c-racer.com