



C-RACER
www.c-racer.com

INSTRUCTION

Model	Product	Code
Yamaha XSR 700 2016+	Seat Cowl	SC-XSR


You are advised to read the instructions carefully, before you proceed to any changes.
Any modifications on your motorcycle should be performed by specialized personnel,
however the installation process of this product is quite easy if you follow the instructions below.



CONTENTS

- Plastic Cover
- 2 X metal supports (L-SCXSR)
- 2X metal logos (L-LOGO-XSR)
- 2 X screws M6X16 (Key bolt)
- 2 X M6 clip nuts
- 2 X plastic washers 6X18
- 1 X Key
- 4 X screws M8X20 (allen-round head washer)
- 2 X insulating fittings 20X40X2
- 1 X insulating fitting 200X10X2

1

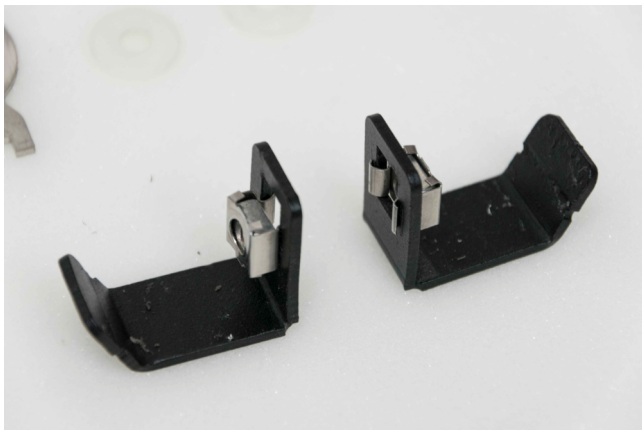

Adjust and place the two clips together as shown in the photo above, and stick the two pieces of insulating fittings.

2



Place the other insulating fitting at the rear part of the seat cover.



3



Turn both the seat and the cover upside down. Adjust the seat inside the cover.

4



Make sure it fits precisely at the rear part of the cover.

5



Hold the support brackets in place using the two screws supplied, as shown in the photo.

6




Press the bracket downwards and tighten the screws with they key supplied in the package. Make sure you have pressed hard enough so that it 'hugs' the seat cover. Place the seat cover in it s prior position – the rear part of the seat cover should frame the tail light.

7



If you wish to remove the rear foot pegs, simply unscrew them.

8

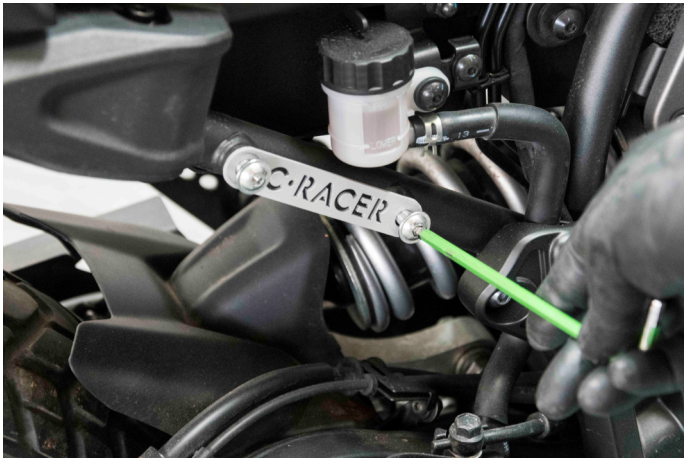

Put the support brackets in place so as the screw holes are no longer visible.

9



Once you have finished, the end result should be as in the photo. Thank you for choosing one of our products. You can watch the installation video at the following link: <https://youtu.be/KOIRQFHRUaw>

The product is for race use only
For any further information please do not hesitate to contact us: Tel.: +30 2108075387 Email: info@c-racer.com