



**C-RACER**  
www.c-racer.com

# INSTRUCTION

Model	Product	Code
Yamaha XSR 700 2016+	Speedometer Holder with Headlight Cover	SH-XSR

You are advised to read the instructions carefully, before you proceed to any changes.  
Any modifications on your motorcycle should be performed by specialized personnel,  
however the installation process of this product is quite easy if you follow the instructions below.



## CONTENTS

- 1 X Plastic cover
- 1 X metal support (base for instrument L-SPEED-XSR)
- 1 X metal cover for handlebars (L-HBAR-XSR)
- 2 X hexagonal adaptors M6X10X20 (RLG-XSR)
- 2 X screws M5X15 (allen-round head-washer)
- 2 X screws M6X15 (allen-round head-washer)
- 2 X washers M5X12
- 3 X rubbers 9X18X8
- 3 X rubbers 9X18X3

1



Undo and remove the metal cover above the front light.  
(this is where you will place the speedometer)

2



Remove the speedometer





3



Make sure the engine switch is in the **OFF** position.  
Remove the connector from the speedometer extra carefully as shown in the photo.

4

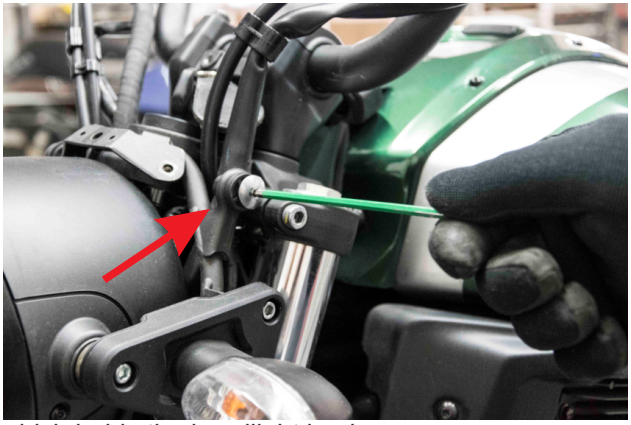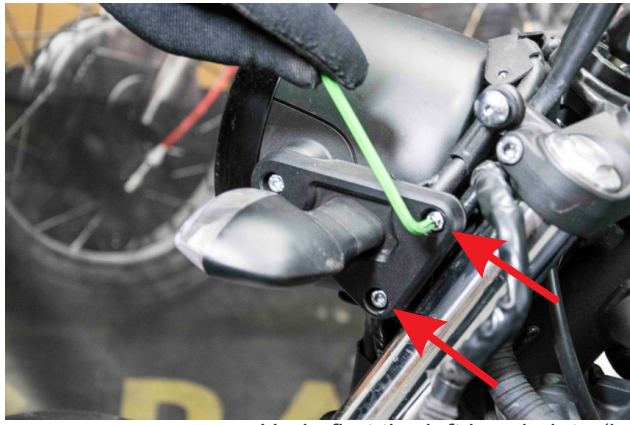

Undo first the left hand plate (both screws) which holds the headlight in place, and then unscrew the two side screws at the base of the headlight. Be careful as the headlight may drop.

5



Both the headlight and its base are now free as you see in the photo.

We do this so we can change the position of the cable that is connected to the speedometer.

6



Slide through the cable with connector of the speedometer as you see in the above pictures, and replace the headlight and its base in its place – screw tight.



7




Remove the three screws located on the back of the speedometer and remove its base plate.

8



Place the rubbers as shown in the photo.

9

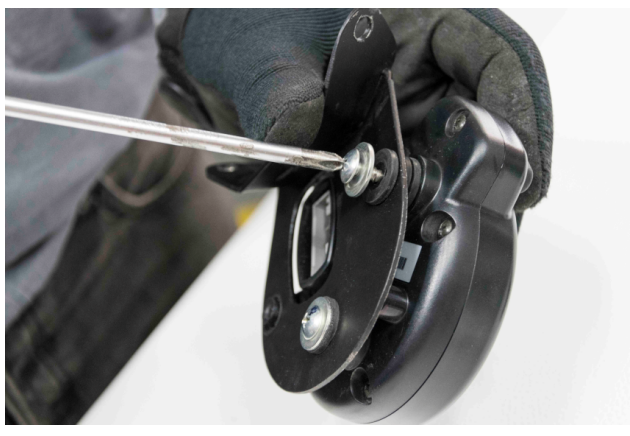

Place the round rubbers under the speedometer and screw in place its base plate using the old screws.

10



Put the connector back in its place.

11



And then the cover that covers the connector.

12



Screw the speedometer in place using the M5X15 screws (at the spot where you removed the metal cover).

13



Place the new cover on the handlebar in the old position of the speedometer using the M6X15 screws.

14



Remove the side screws that hold the headlight in place.



15



Remove the old coil that is inside the headlight and replace it with the new one. You may perform that on both sides.

Then place the headlight in position without putting the screws.

16



Place the new cover between the headlight and the speedometer—in order to place it correctly hold it as shown in the photo while keeping an opening on both sides of about 5mm.

17



Push it downwards so that it goes through the headlight and its base plate. Screw the side screws on that hold the headlight in place.

NOTE: If the headlight screw is loose use a pair of tongs to hold it in place underneath so that you may tighten it more easily.



The end result should appear as in the photo. Thank you for choosing one of our products. You may watch the installation video at the following link: <https://www.youtube.com/watch?v=G9bCQ4VOVfw>

**The product is for race use only**

For any further information please do not hesitate to contact us: Tel.: +30 2108075387 Email: [info@c-racer.com](mailto:info@c-racer.com)